

STAINLESS STEEL CRANE 01M5AISI

LIFTING CAPACITY 1102 LB

COUNTERBALANCED SWIVEL CRANE HYDRAULIC LEVER CONTROLLED FAST LIFT

DOUBLE ACTION PUMP – FINE CONTROL DESCENT KNOB



Model		01M5AISI
Drive		Manual
Standard finish		Micro peening matt finish surface
Other finishes available on demand		Electropolishing or mirror polishing
Rotation		360° manual - slewing bearing system
Arm lifting		Manual – double action lifting pump
Arm lowering		Manual – descent knob
Arm extension		Manual – lockable in 4 positions
Width with arm not rotated	inch.	39
Width with arm rotated at 90°	inch.	45
Max capacity with standard arm	lbs.	1102 * see load chart below
Max capacity with extension PZG_AISI	lbs.	551 * see load chart below
Weight of the crane (counterweight incl.)	lbs.	1322
Battery type		-
Batteries nos.	pcs	-
Battery voltage / nominal capacity	V / Ah	-
Lifting motor	W	-
Traction motor	W	-






**CE certified – this crane is fully manual operated
therefore the UL certification is not requested**

Flex Lifting - a brand of AxA Group srl


Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com website: www.flexlifting.com

CRANE 01M5AISI MAIN DIMENSIONS

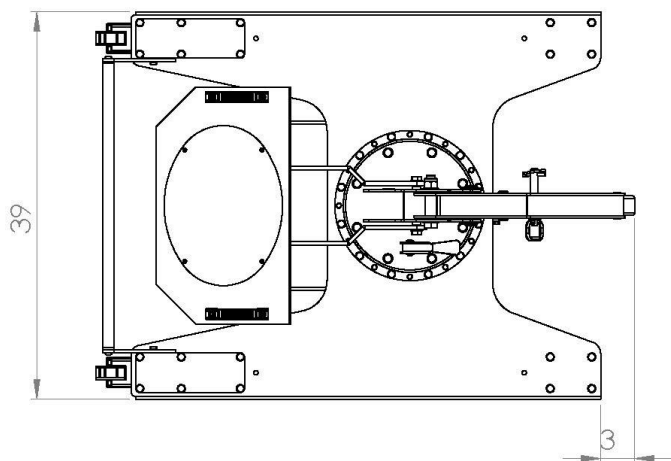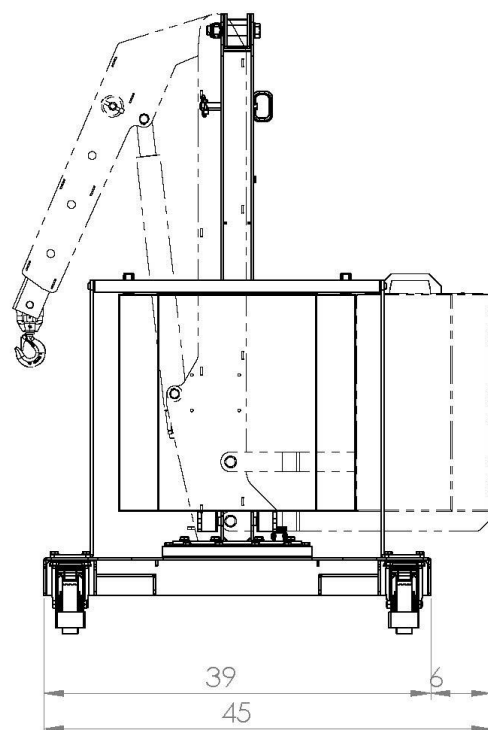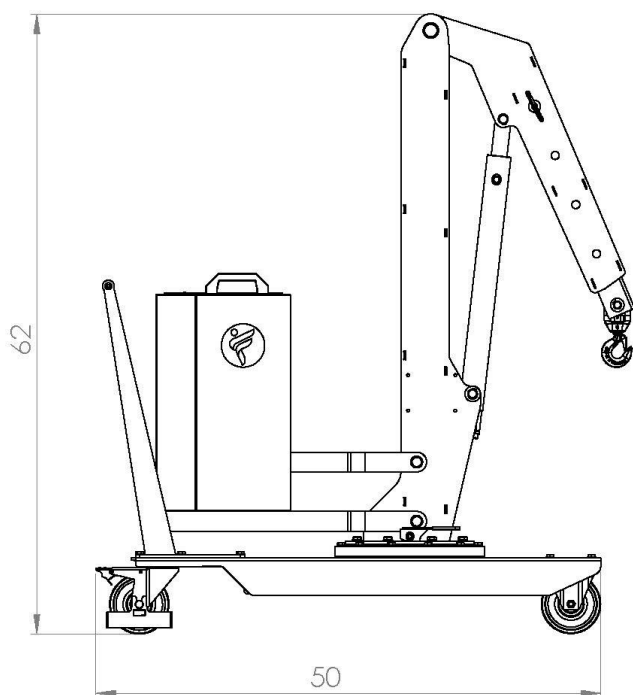

CRANE 01M5AISI

DETAILED DIMENSIONS WITH STANDARD ARM

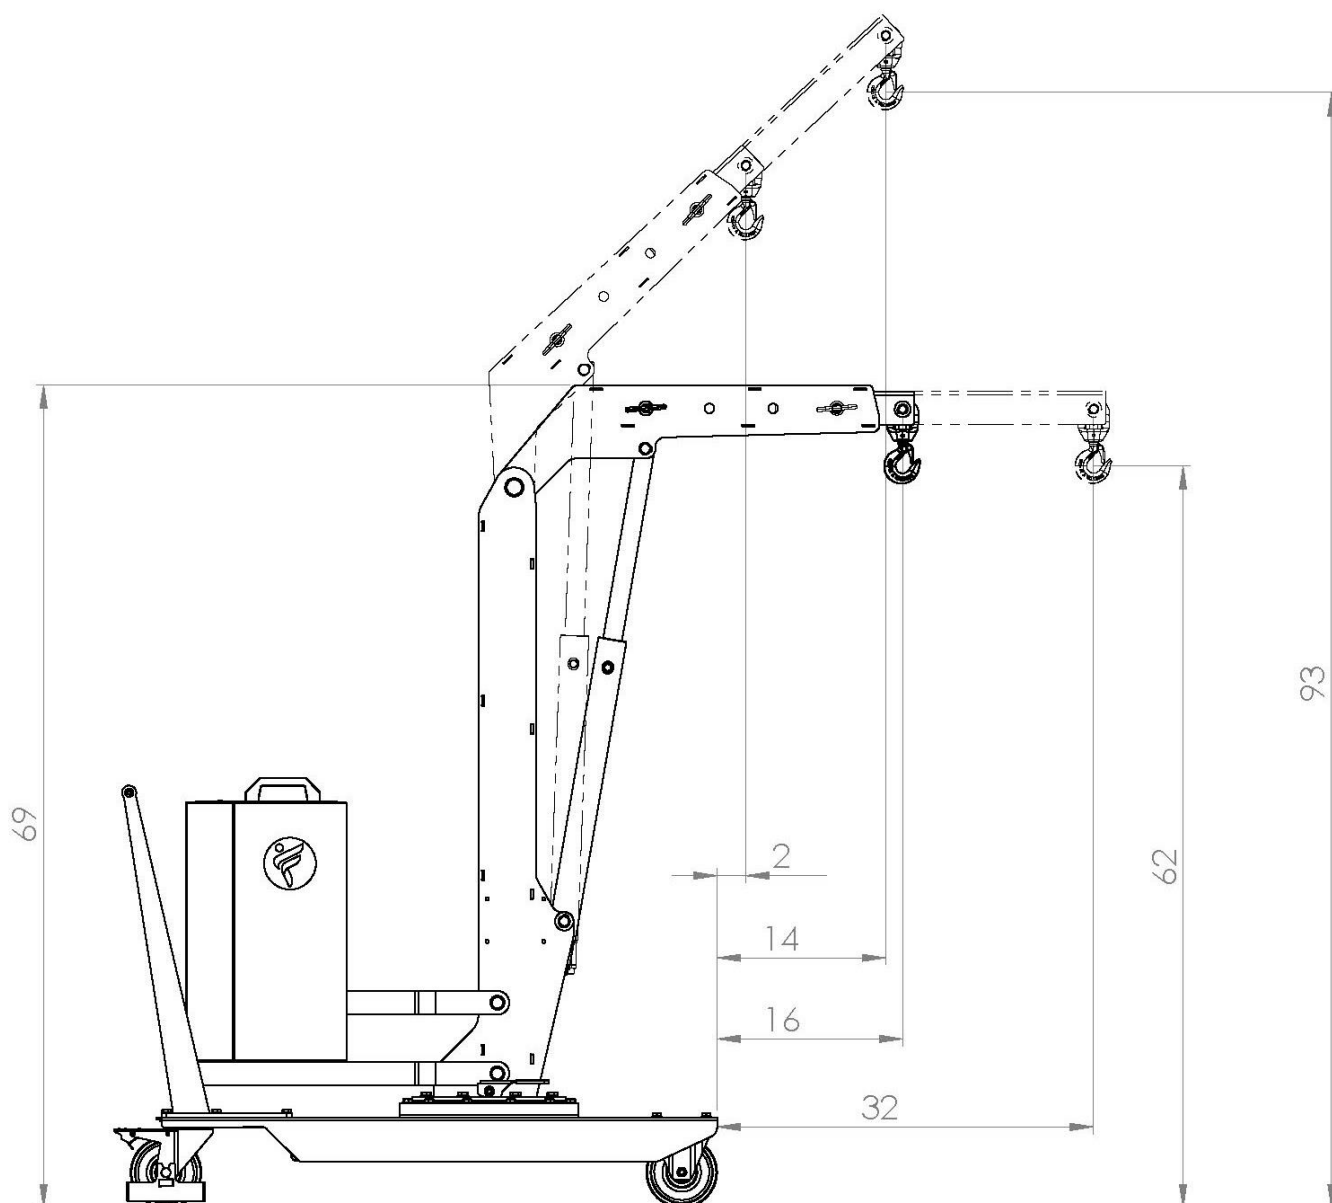


CRANE 01M5AISI MAIN DIMENSIONS




CRANE 01M5AISI

LOAD CHART WITH STANDARD ARM

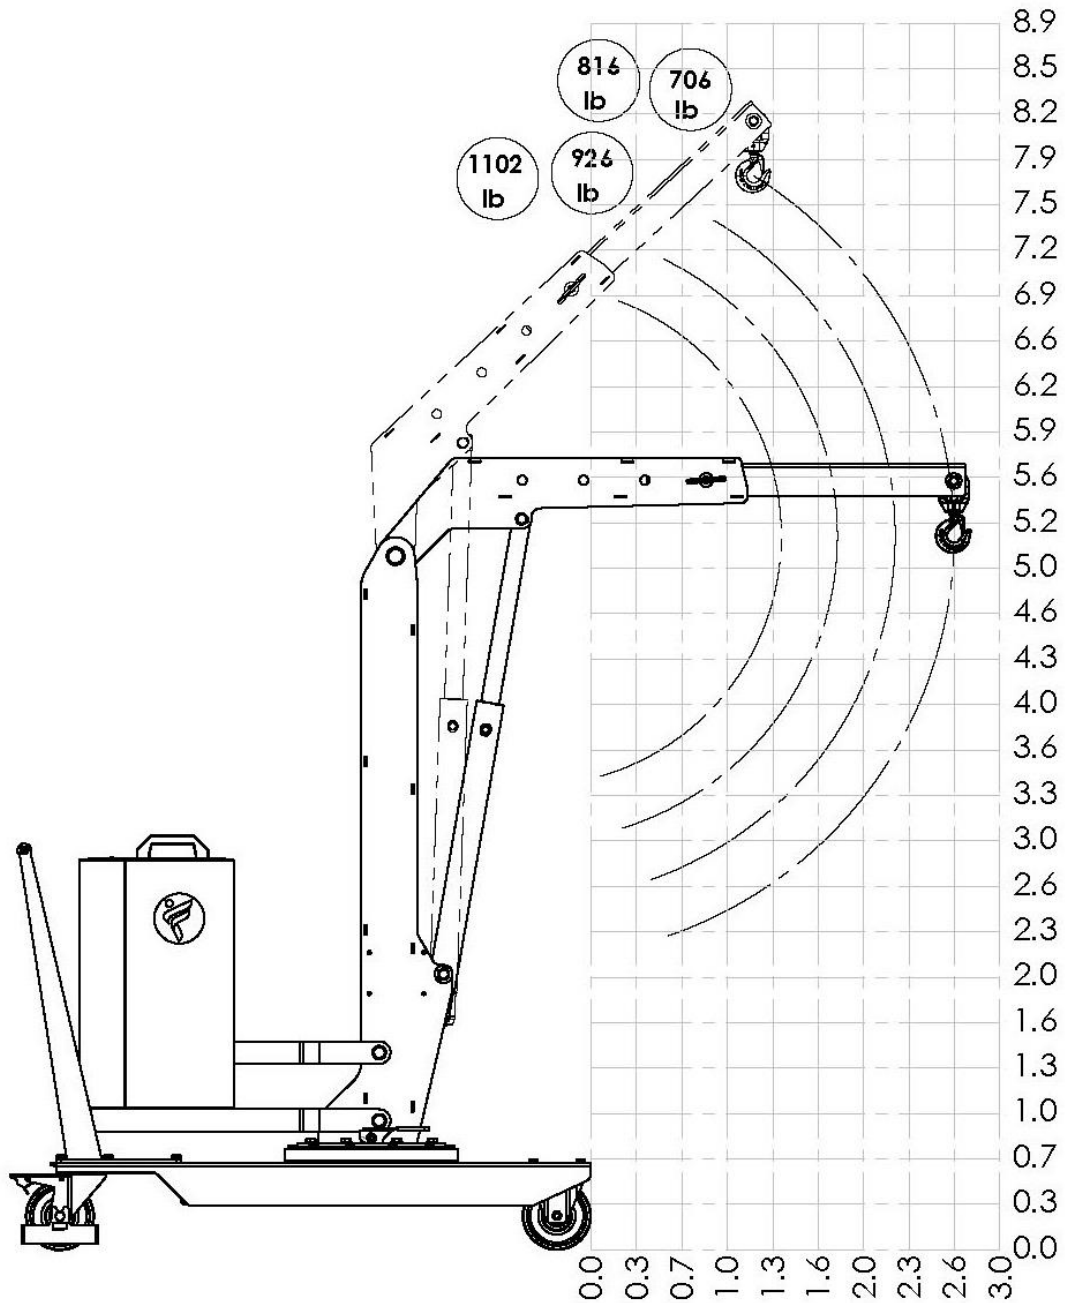

CRANE 01M5AISI

LOAD CHART WITH OPTIONAL EXTENSION PZG_AISI

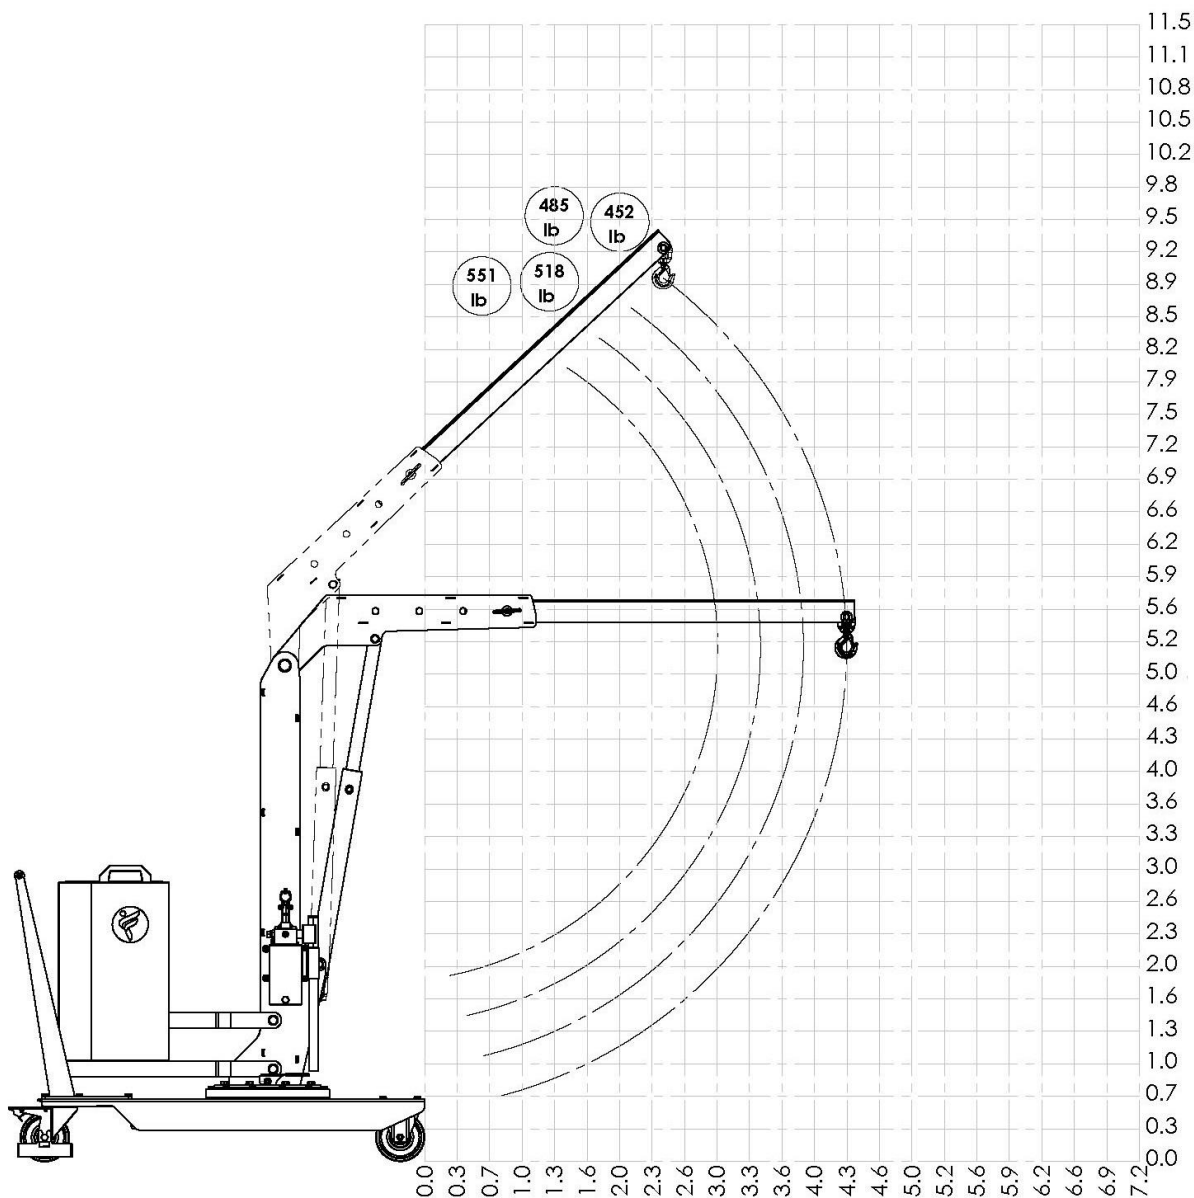

POS.	OVERHANG MM / INCH.	CAPACITY KG / LBS.
1	865 / 34	250 / 551
2	1000 / 39	235 / 518
3	1135 / 45	220 / 485
4	1270 / 50	205 / 452