

CRANE FLEX G1000DBR

LIFTING CAPACITY 2204 LB

MOTORISED COUNTERBALANCED SWIVEL CRANE

ELECTRIC LIFT/LOWER/EXTEND/RETRACT/ROTATION THROUGH RADIO CONTROL WITH PROPORTIONAL JOYSTICK



Model		FLEX G1000DBR
Drive		Electric
Rotation		220° electric controlled
Arm lifting		Electric – remote control
Arm lowering		Electric – remote control
Arm extension		Electric – remote control
Width with arm not rotated	inch.	39
Width with arm rotated at 90°	inch.	44
Width with arm rotated at 90° and upgrade to optional compact ballast	inch.	39 * see drawing below
Max capacity with standard double boom	lbs.	2204 * see load chart below
Weight of the crane (counterweight incl.)	lbs.	3483
Battery type standard		Maintenance free AGM
Batteries nos.	pcs	2
Battery voltage / nominal capacity	V / Ah	12 / 120
Lifting motor	W	800
Traction motor	W	1000


Available with the following certifications:





Flex Lifting - a brand of AxA Group srl

Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com website: www.flexlifting.com


CRANE FLEX G1000DBR MAIN DIMENSIONS

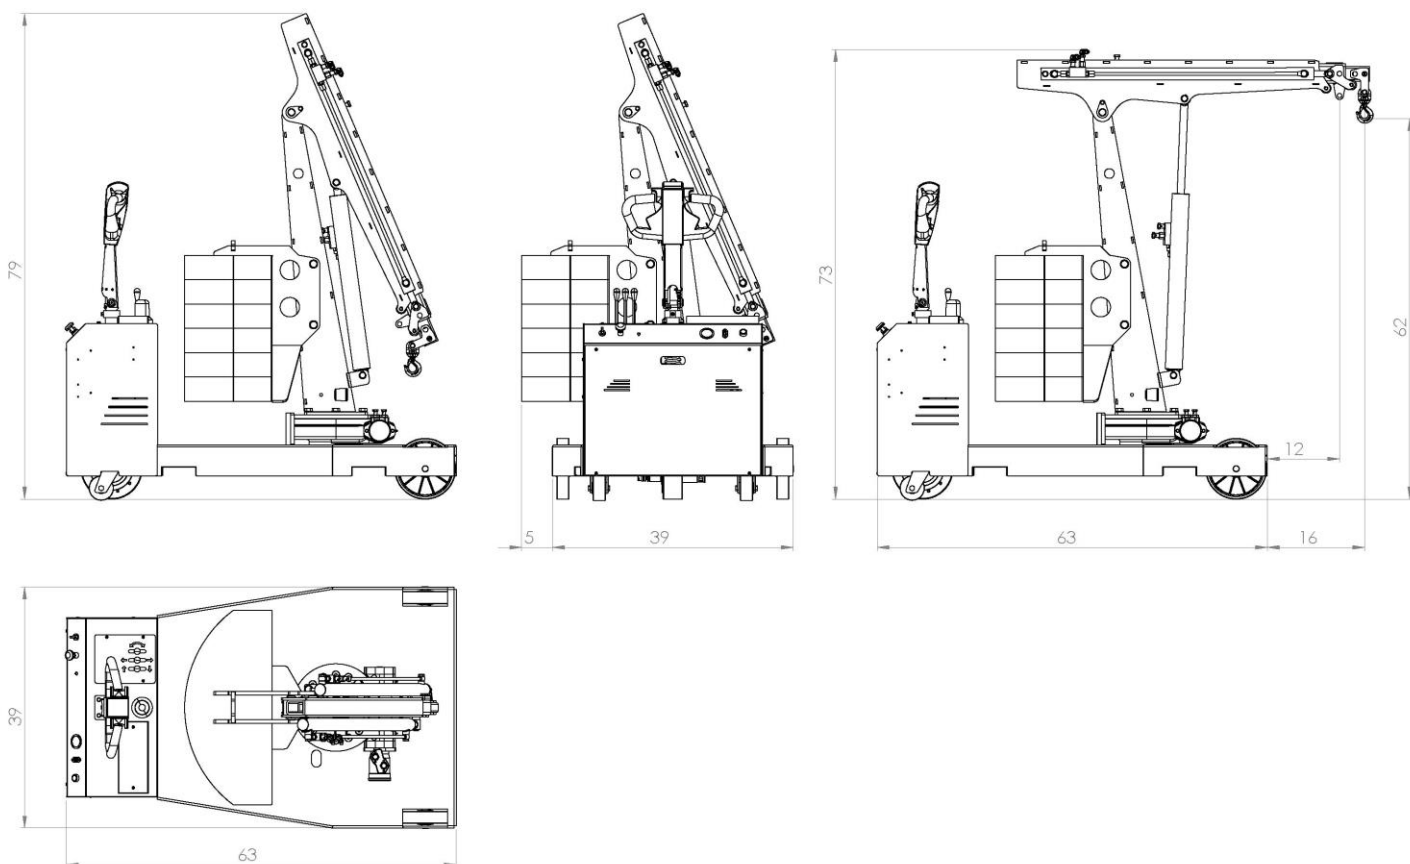

CRANE FLEX G1000DBR WIDTH WITH COMPACT BALLAST PB_FLEX G1000DB

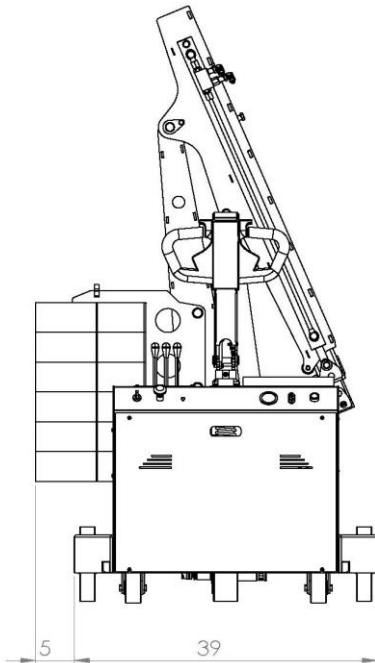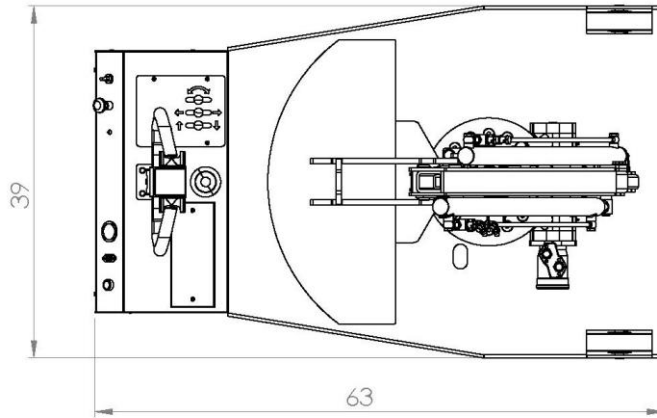


WITH STANDARD BALLAST:
WHEN THE ARM IS ROTATED AT 90°
THE BALLAST **EXCEEDS** THE CRANE
WIDTH BY 5''

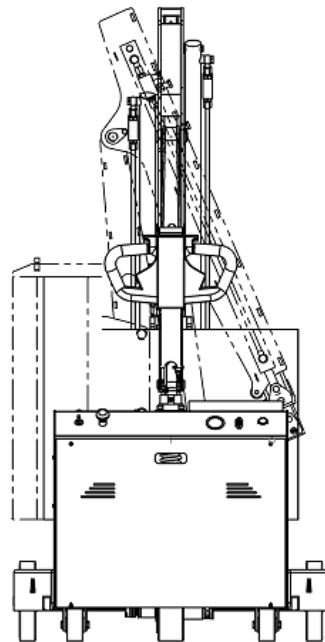

UPGRADE TO COMPACT BALLAST
(CODE PB_FLEX G1000DB)
WHEN THE ARM IS ROTATED AT 90° THE
BALLAST **DOESN'T EXCEED** THE CRANE
WIDTH OF 39''


CRANE FLEX G1000DBR

DETAILED DIMENSIONS WITH STANDARD ELECTRIC TELESCOPIC DOUBLE BOOM FULLY RETRACTED

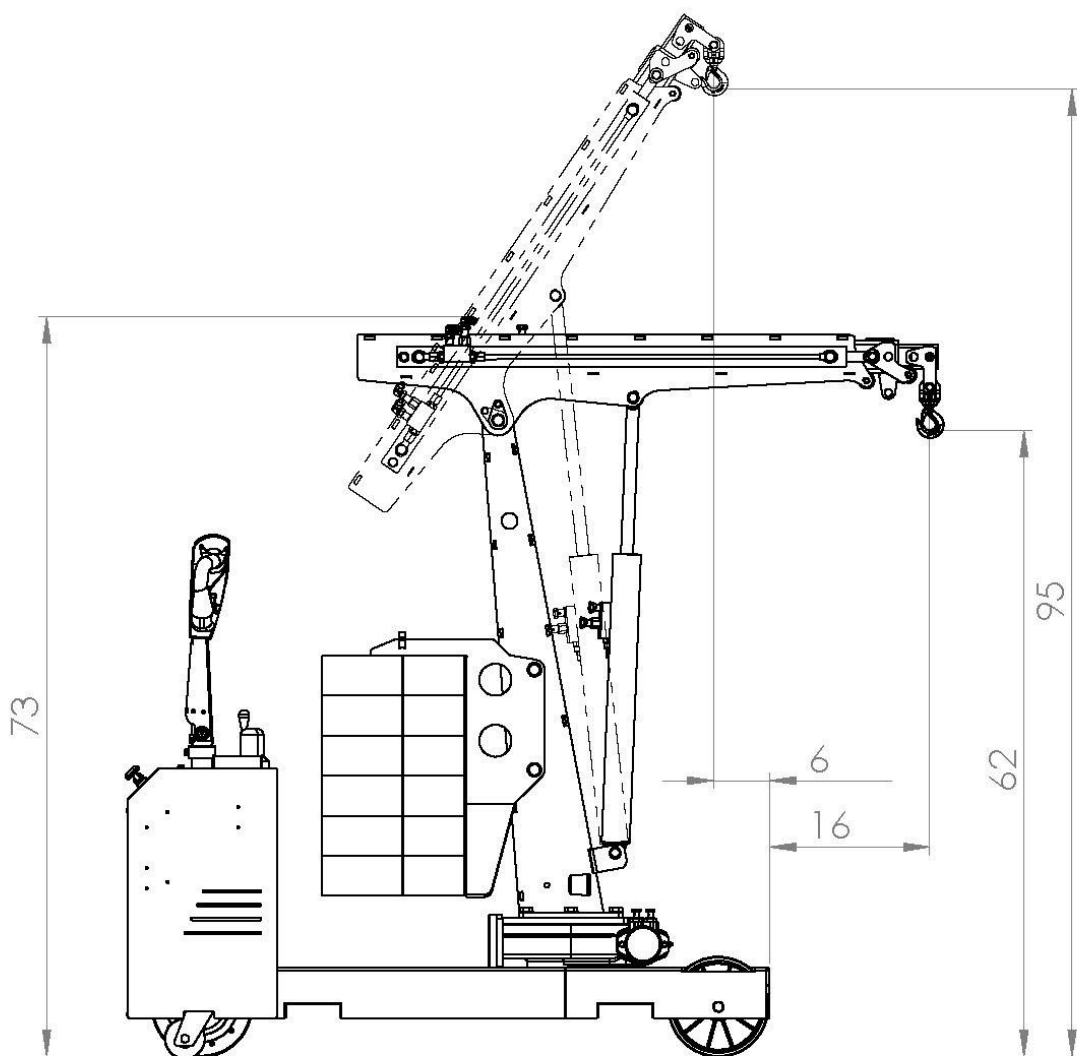


CRANE FLEX G1000DBR

DETAILED DIMENSIONS WITH STANDARD ELECTRIC TELESCOPIC DOUBLE BOOM FULLY EXTENDED

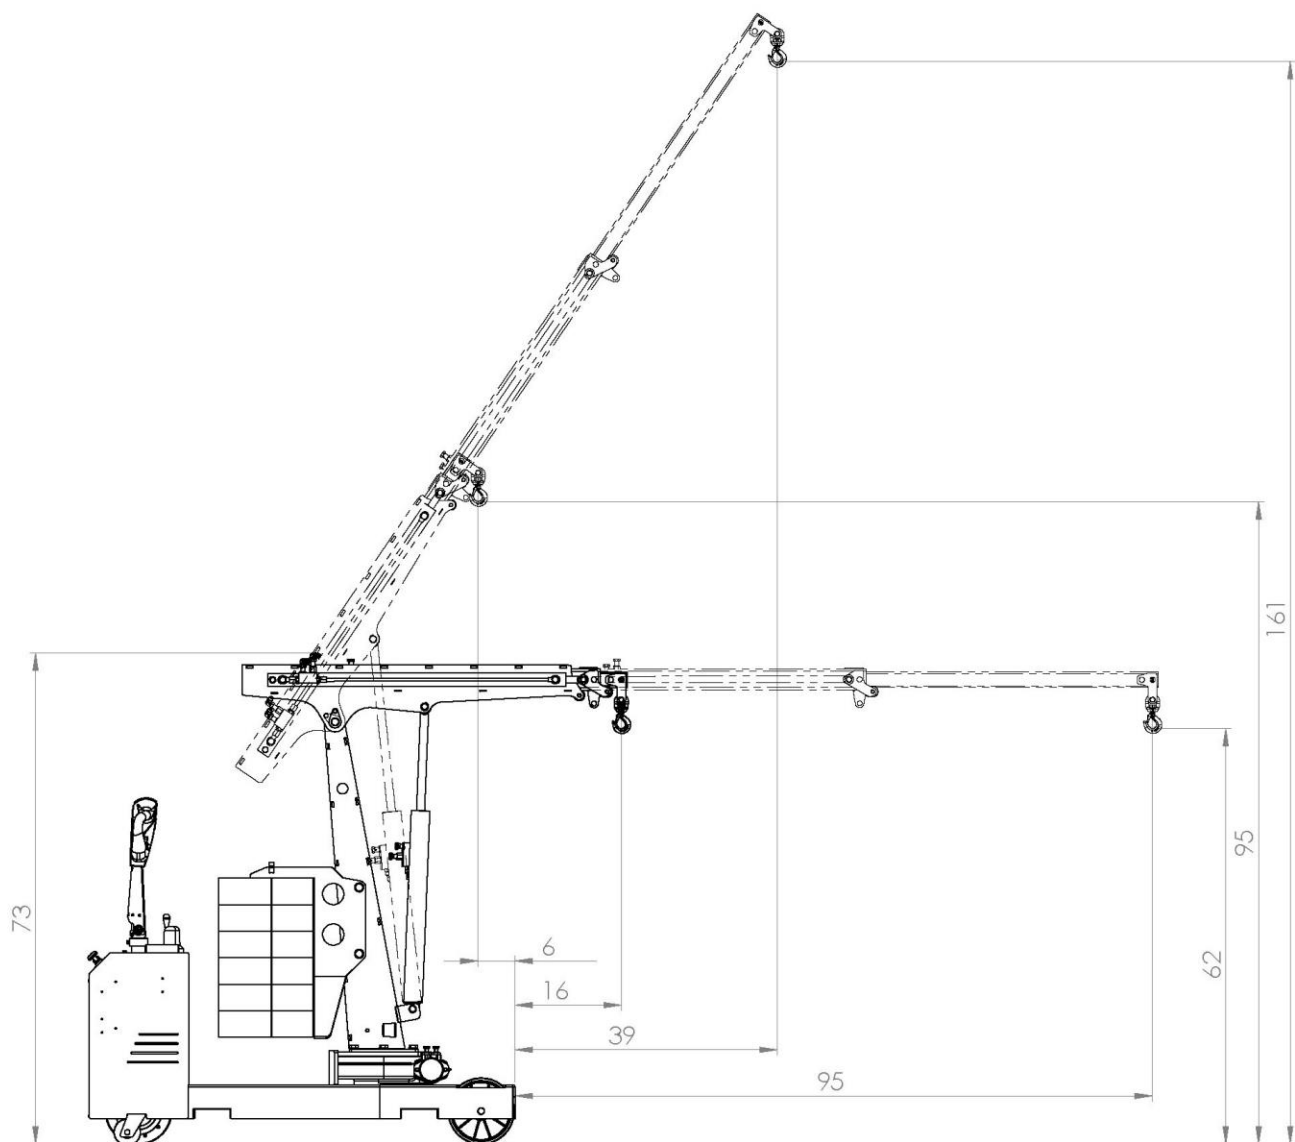

CRANE FLEX G1000DBR MAIN DIMENSIONS

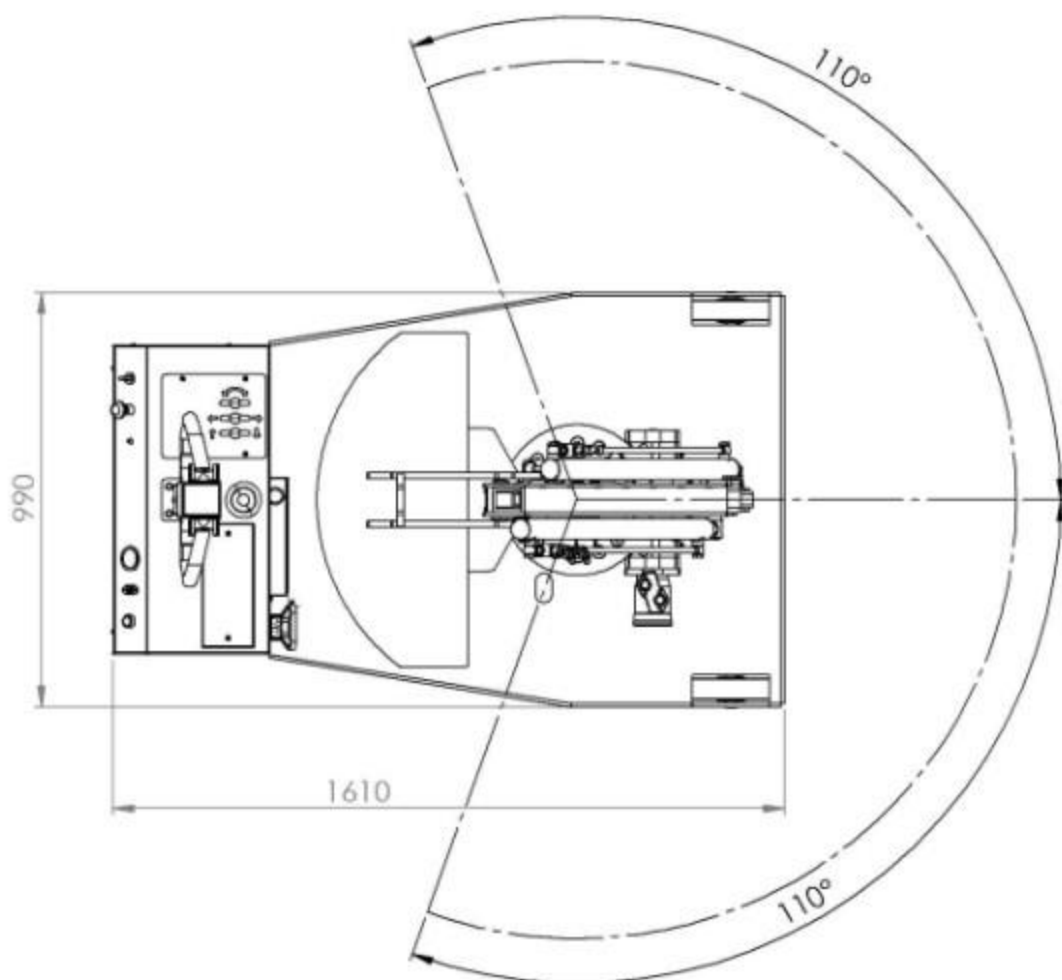

CRANE FLEX G1000DBR

LOAD CHART WITH STANDARD ELECTRIC TELESCOPIC DOUBLE BOOM

