



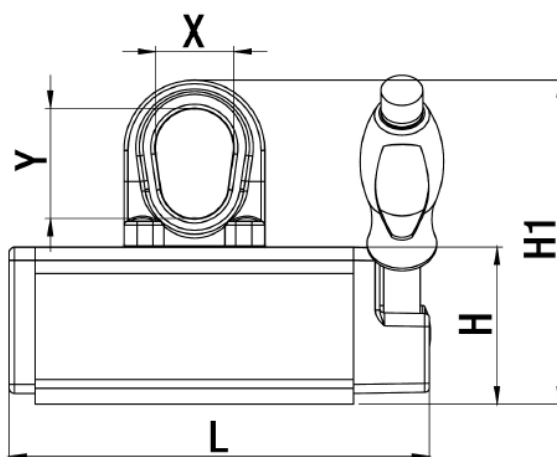

FX SERIES UNIVERSAL PERMANENT LIFTING MAGNETS

In the standard design, the FX lifting magnets have a broad spectrum of applications. The FX has good results with a large air gap as well as with thin, flat and round materials. A feature of this product is its highly sturdy nature and a good price performance. Made in Germany. Standard conformity CE/EN 13155/MRL 2006/42 EWG

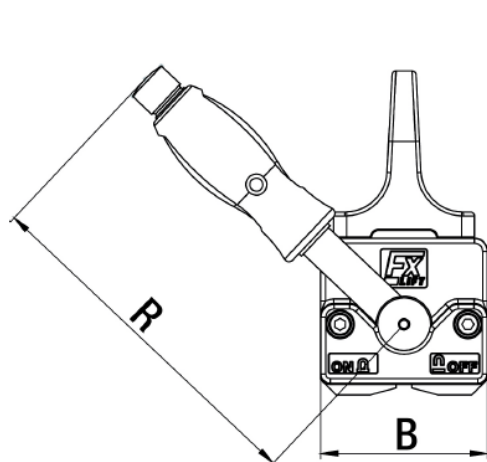

MODEL	MAX LOAD CAPACITY (kg)		MAX LOAD CAPACITY FROM(mm)	DIMENSIONS (mm)						WEIGHT kg
	FLAT	ROUND		L	B	H	H1	R	X/Y	
FX 150	150	diam 50-200 mm 75 kg	8	161	64	60	124	136	30/42	3.6
FX 300	300	diam 50-300 mm 150 kg	15	205	87	78	158	190	42/53	8.4
FX 600	600	diam 80-400 mm 300 kg	20	288	112	94	189	228	51/62	19
FX 1000	1000	diam 100-450 mm 500 kg	25	361	152	120	240	261	60/76	42
FX 2000	2000	diam 120-600 mm 1000 kg	50	472	228	169	313	409	68/89	115

Safety Factor 3.5 – Test Method EN 13155 – Max. operation temperature 80°C

www.flexlifting.com

Flex Lifting - a brand of AxA Group srl

Via Morandi 21, 40060 Toscanella di Dozza (Bologna) Italy Tel +39 0542673434 email: info@flexlifting.com